INFRONT

Shandong Infront Machinery Co., Ltd.

MINI EXCAVATOR

CE ISO EPA EURO 5 SGS TÜV SÜD

YFE12

KOOP/Briggs & Stratton
BATTERY TYPE

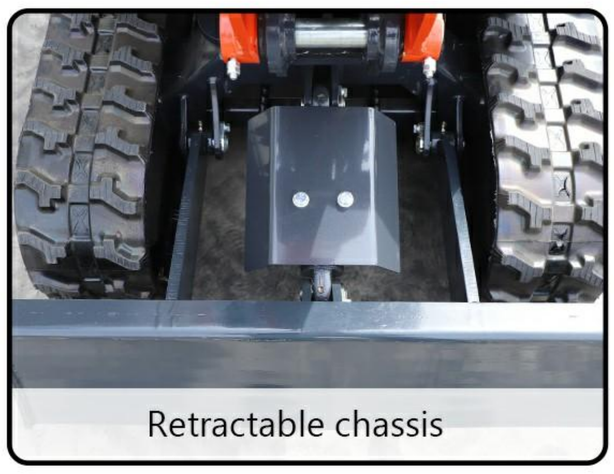
2790*850*1985MM
OVERALL SIZE

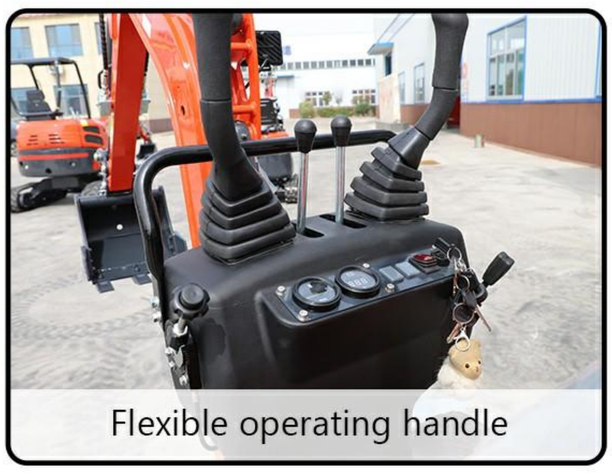
1200KG
OPERATING WEIGHT

CUSTOMIZATION
INDIVIDUATION

MACHINE SIZE	
Overall dimensions	2790*850*1985mm
Machine weight	860kg
Bucket capacity	0.02m³
Engine model	192FA
Displacement	0.499L(cc)
Output power	7/3000KW/rpm
Slewing speed	11r/min
Travel speed	1.8km/h
Swing angle	56/55°
Gradability	58(30)%（°）
Average ground pressure	20kpa
Bucket digging force	6.5kn
Fuel tank capacity	5.5L

SCOPE OF WORK	
Maximum digging height	2775mm
Maximum dumping height	1835mm
Maximum digging depth	1670mm
Maximum vertical digging depth	1300mm
Maximum digging radius	3075mm
Maximum ground digging radius	3035mm
Minimum front rotation radius	1410mm
Center of rotation to end of crawler track	650mm
Dozer blade width	850mm
Dozer blade height	216mm
Maximum dozer height	115mm
Maximum dozer depth	238mm

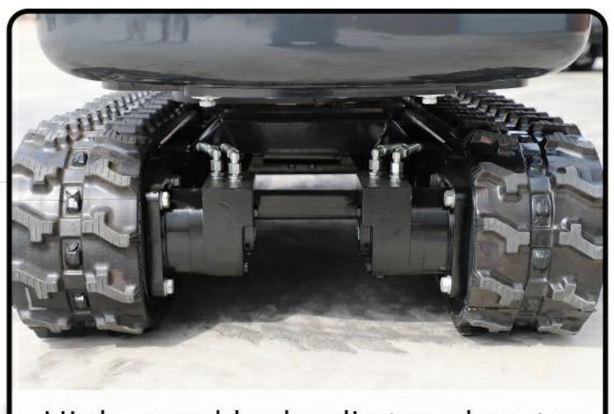

Retractable chassis


Flexible operating handle

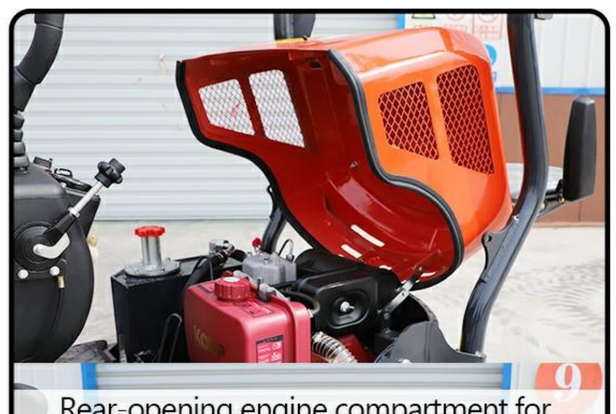

Detachable driving shed


Made of high-strength cast steel


Hydraulic cylinder baffle


High speed hydraulic travel motor


Brand Engine


Rear-opening engine compartment for easy maintenance

www.chinaift.com

Tel: +86-537-2934666 Fax: +86-537-2934999 Email: info@chinaift.com

Address: Hi-tech Industrial Park, Jining CityShandong Province, China **Shandong Infront Machinery Co., Ltd.**